


Steady arm


Steady arm

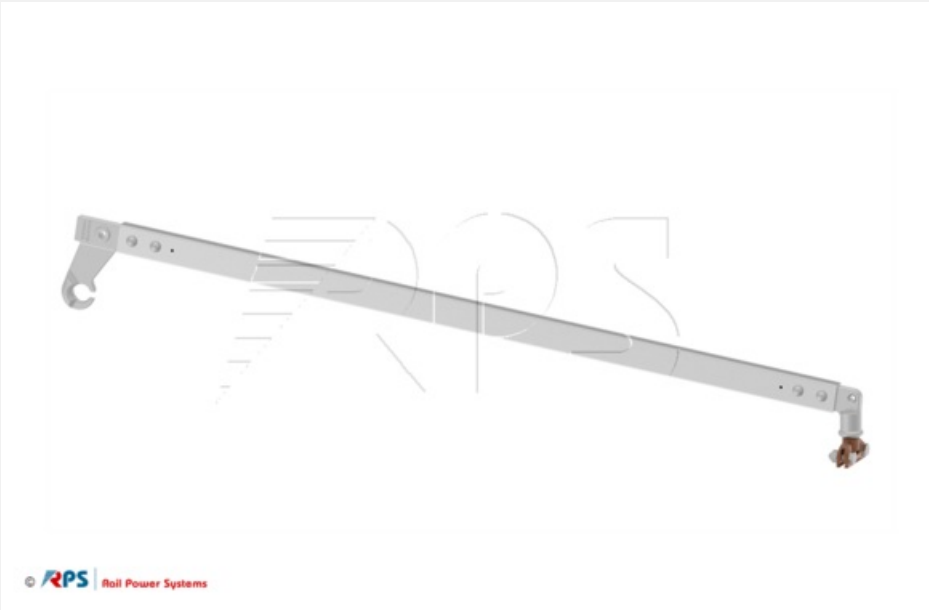

Material-ID	Name	Drawing Number
3EGF015589	Steady arm	EBS05.96.28-2 A

Steady arm, 1050 mm length

Steady Arm

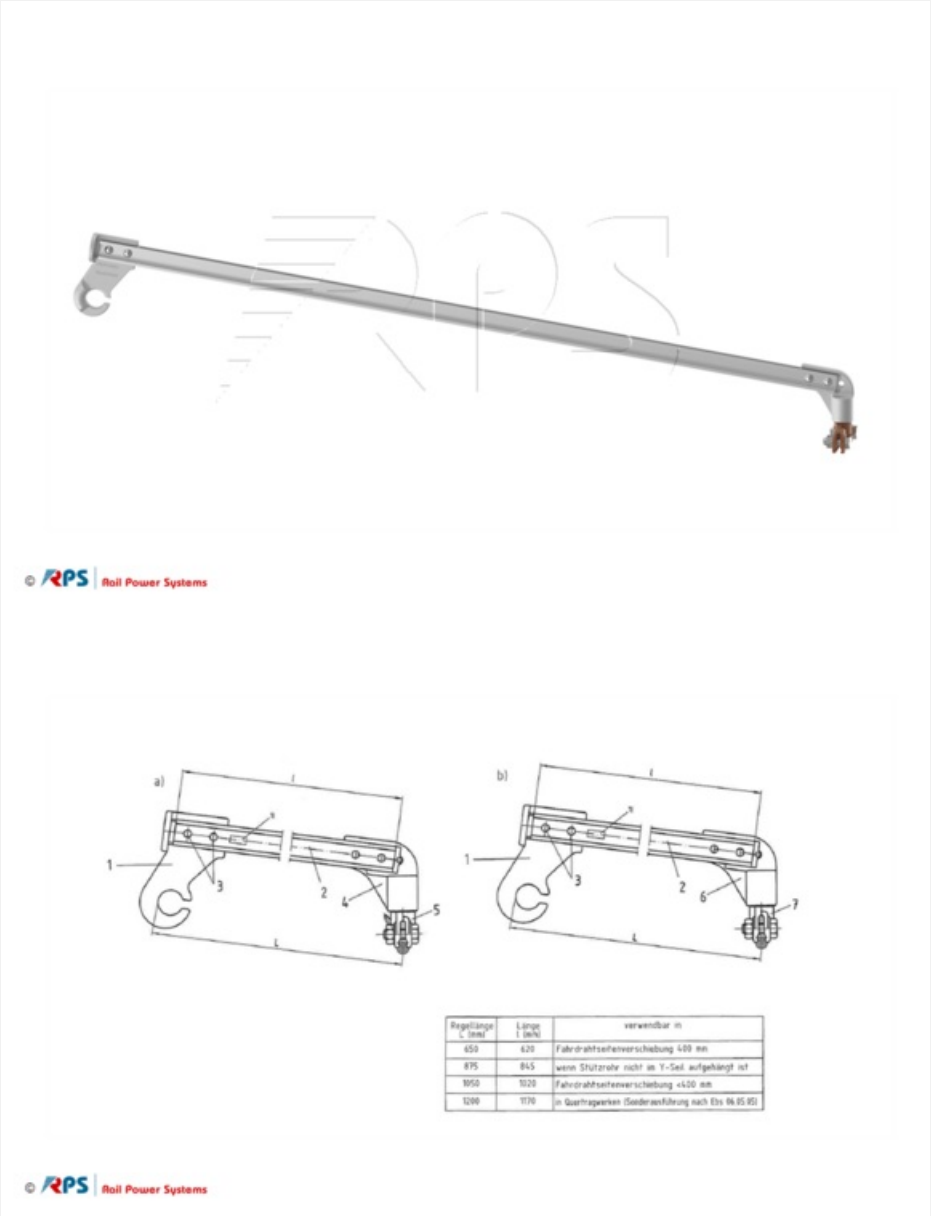


Material-ID	Name	Weight	L	Drawing Number
3EGF016280	Steady arm	1,06 kg	1050 mm	Ebs 05.95.23-2/b

Steady arm, insulated, 3 kV


With glass fibre reinforced plastic rod 35 x 15 mm, offset hook end fitting made of cast aluminium, contact wire support made of multicomponent bronze.

Other lengths available on request.

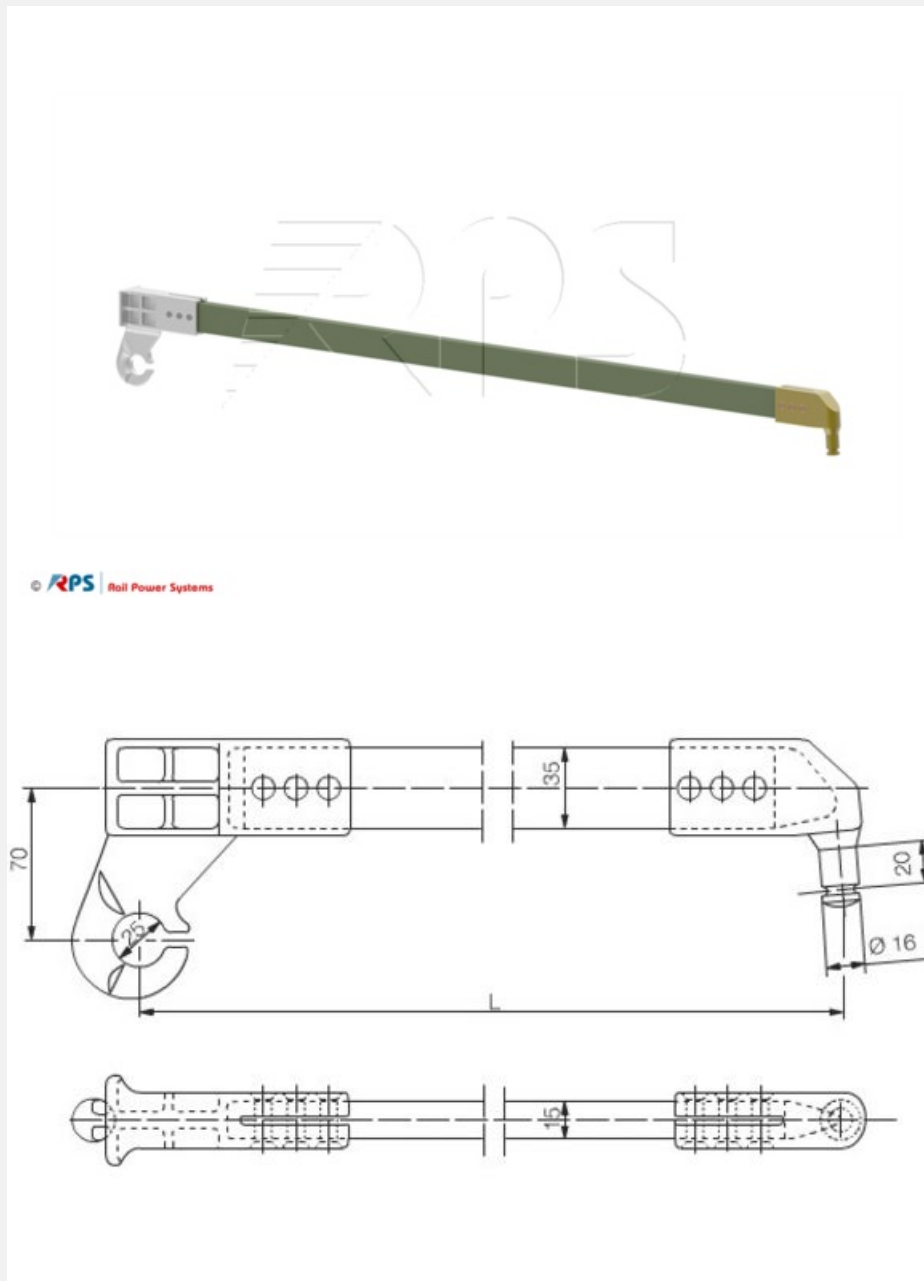

Material-ID	Name	Weight	Nominal Force	Rated impulse withstand voltage	Drawing Number
3EGF007055	Steady arm	1,10 kg	7,5 kN	3 kV	GVT3516721


Steady arm

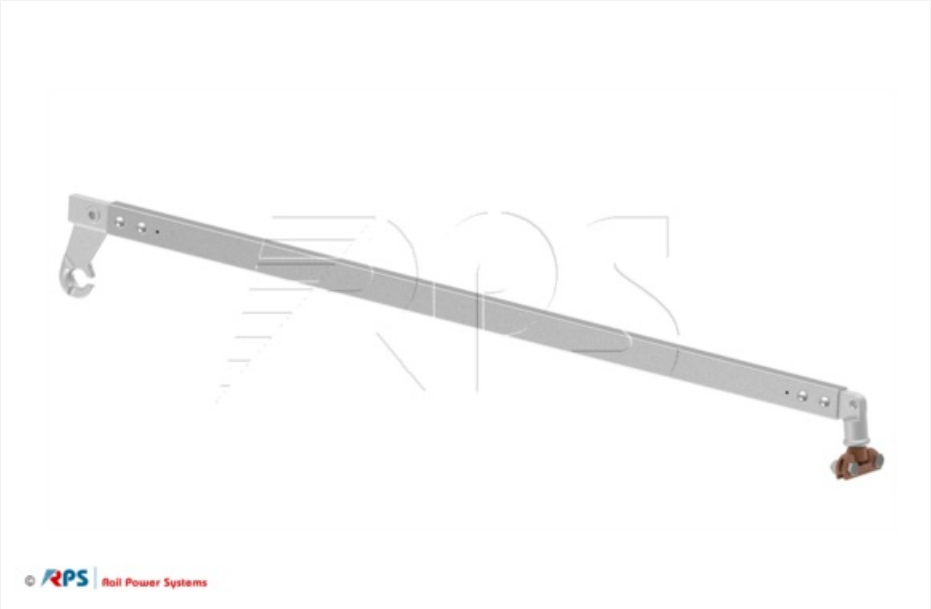

Material-ID	Name	Weight	Drawing Number
3EGF015588	Steady arm	1,7 kg	3EGF010596Z3063

Steady arm, angled


lightweight construction with rectangular aluminium profile 40 x 20 x 2.5 mm, hook end fitting, angle and clamp holder made of cast aluminium

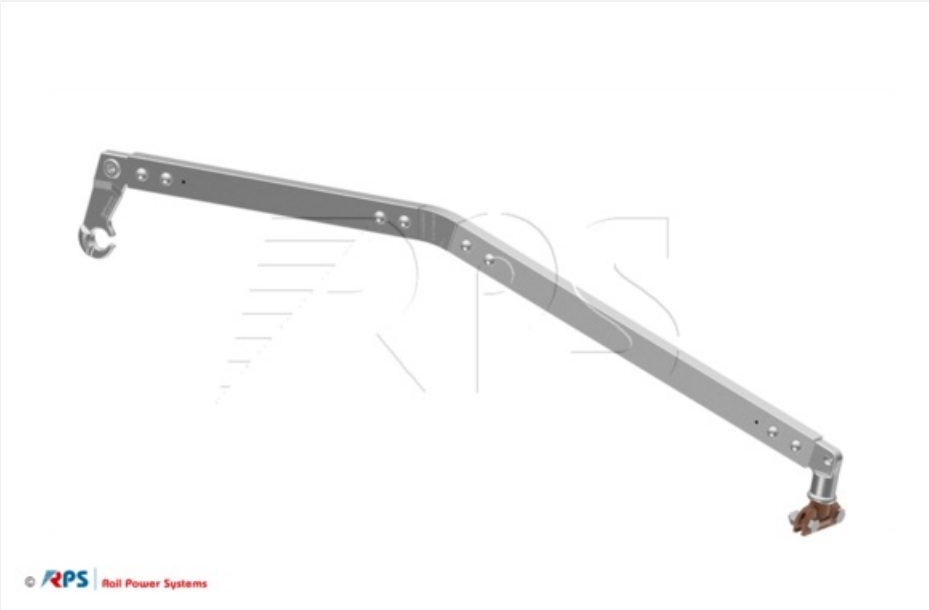

Material-ID	Name	Weight	L	Nominal Force	Drawing Number
3EGF010063	Steady arm	1,597 kg	1050 mm	7,5 kN	Ebs 05.95.17
3EGF011873		1,664 kg	1150 mm	7,5 kN	Ebs 05.95.17
3EGF011874		1,731 kg	1250 mm	7,5 kN	Ebs 05.95.17
3EGF011875		1,798 kg	1350 mm	7,5 kN	Ebs 05.95.17
3EGF011876		1,865 kg	1450 mm	7,5 kN	Ebs 05.95.17

Pull-off steady arm, insulated, 3 kV

Bend steady arm for registration

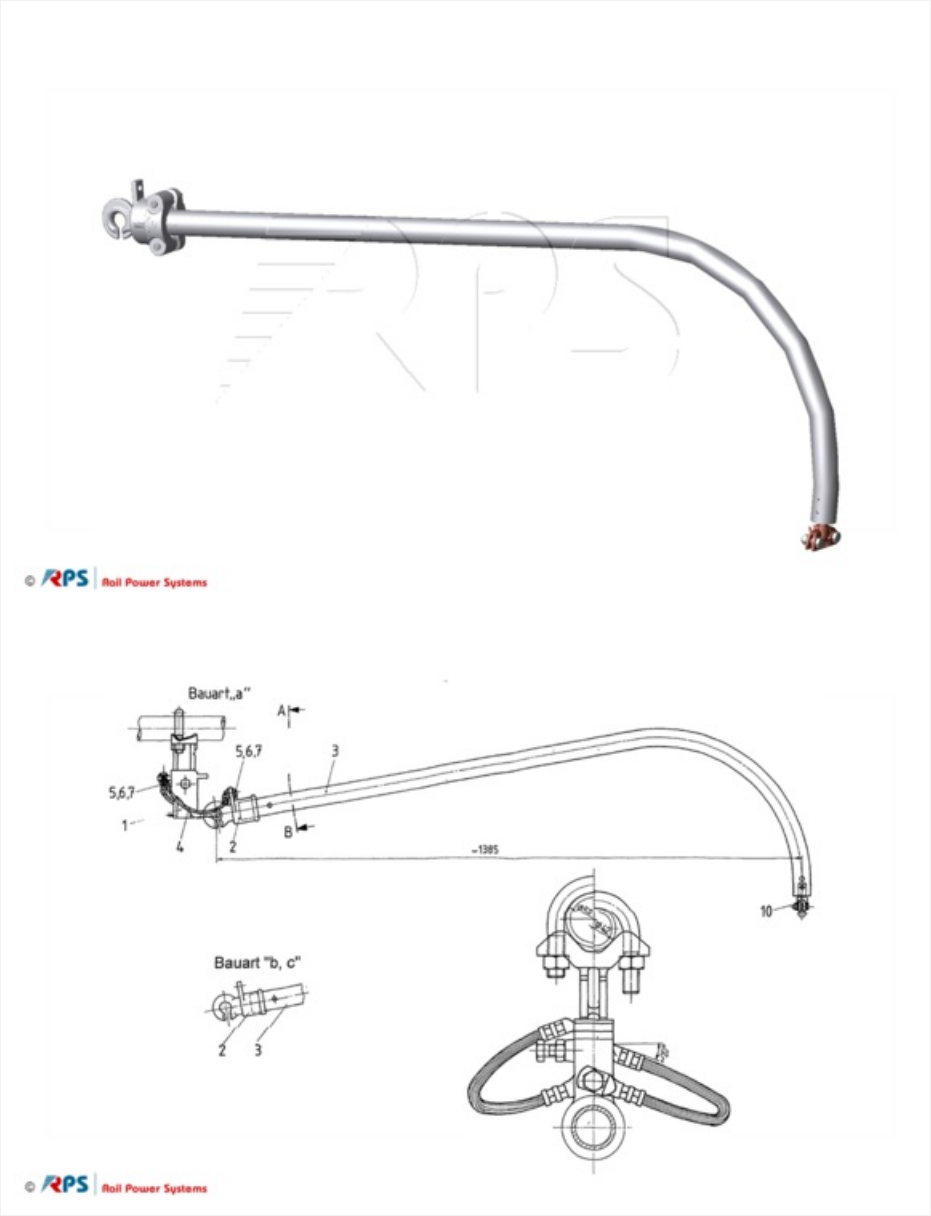

Material-ID	Name	Weight	Build Type	Drawing Number
3EGF019234	Steady arm	3,15 kg	a	Ebs 05.96.31/b

