



Adjusting spindle for expansion joint

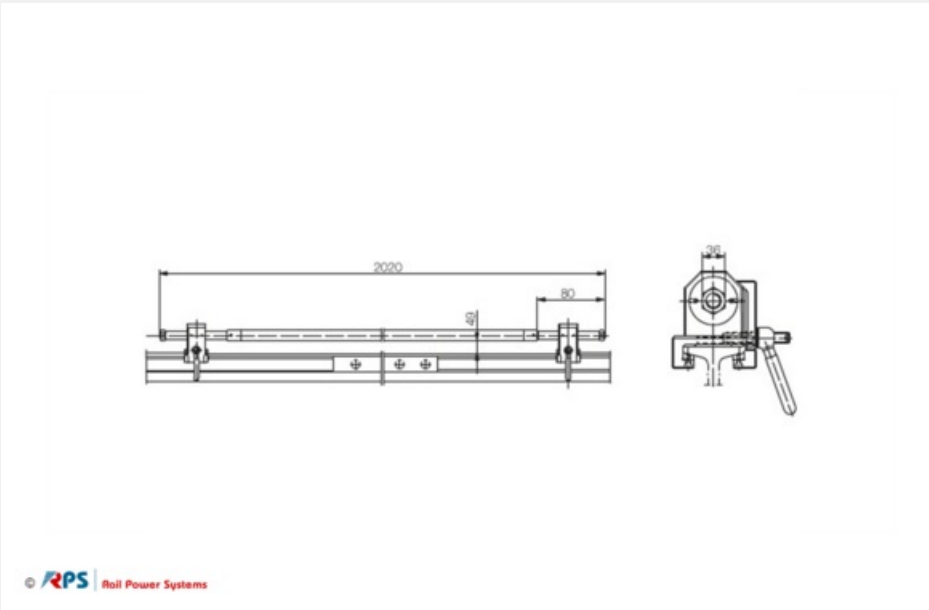

Material-ID	Drawing Number
3EGF011618	6900-102.358555-2


Dropper assembling Workbench

up to 2.38 m dropper length, for pressing crimp connector and cable lug.

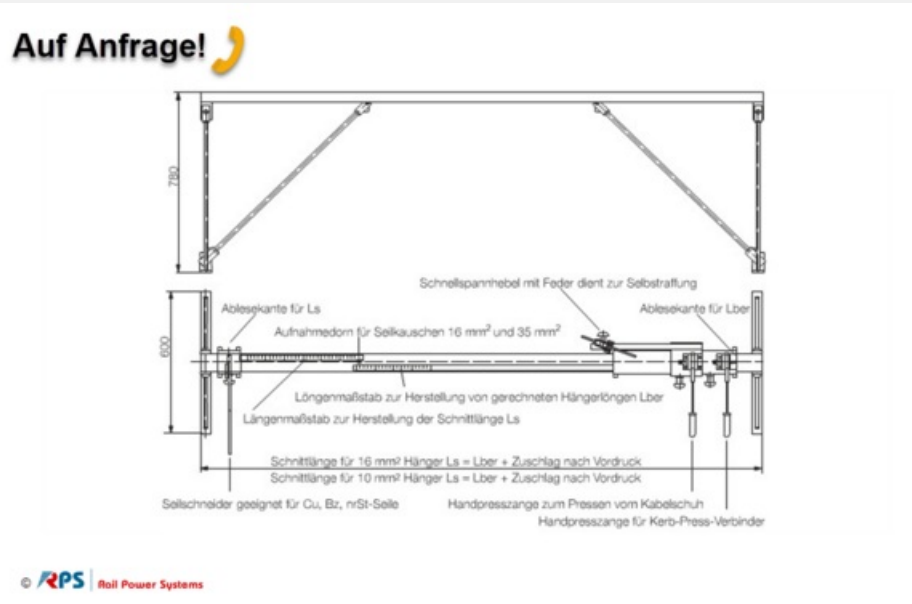

Material-ID	Build Type	Weight	Drawing Number
3EGF012048	Compression die for 10 mm² wire	55,0 kg	3EGF001143Z2271 A
3EGF005645	Compression die for 16 mm² wire	55,0 kg	3EGF001143Z2271 B


Device for replacing insulator at cantilever

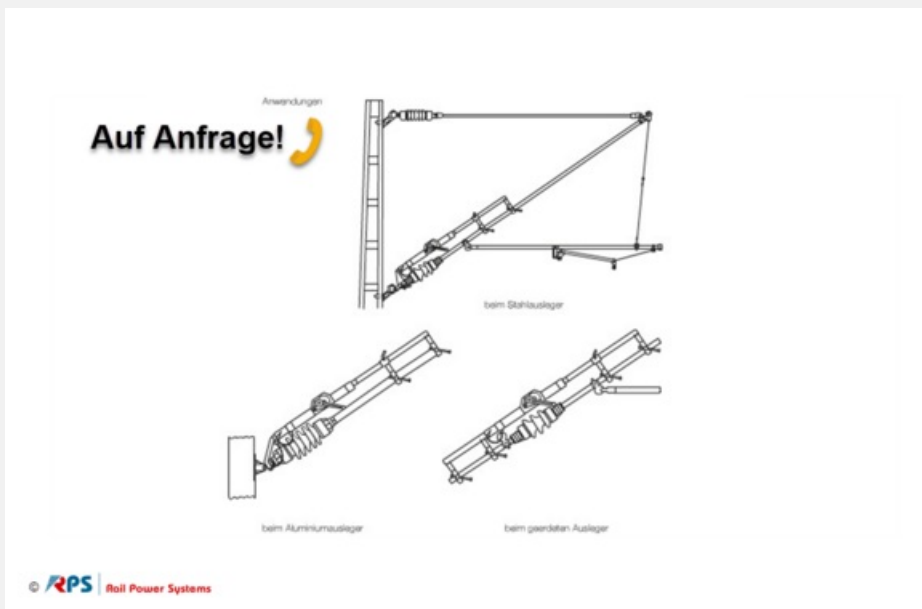

Material-ID	Build Type	Drawing Number
3EGF009946	for cantilevers up to Re 200	3Ebgw 04.88
3EGF010282	for cantilever Re 250 up to Re 330	3Ebgw 04.88

Telescopic ground rod in three parts


with automatic locking head

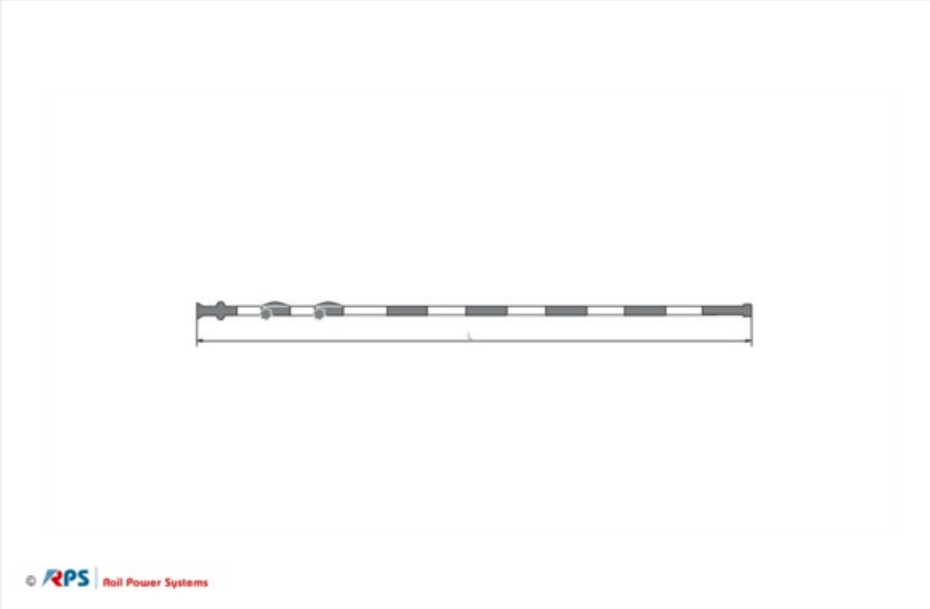

Material-ID	Weight	L	Drawing Number
3EGF011828	5,2 kg	2000 - 5080 mm	Gw 715.01. Bl. 41
3EGF011829	5,2 kg	3200 - 7000 mm	Gw 715.01. Bl. 41

Telescopic ground rod


2-section, with automatic locking head for feeder and traction current line

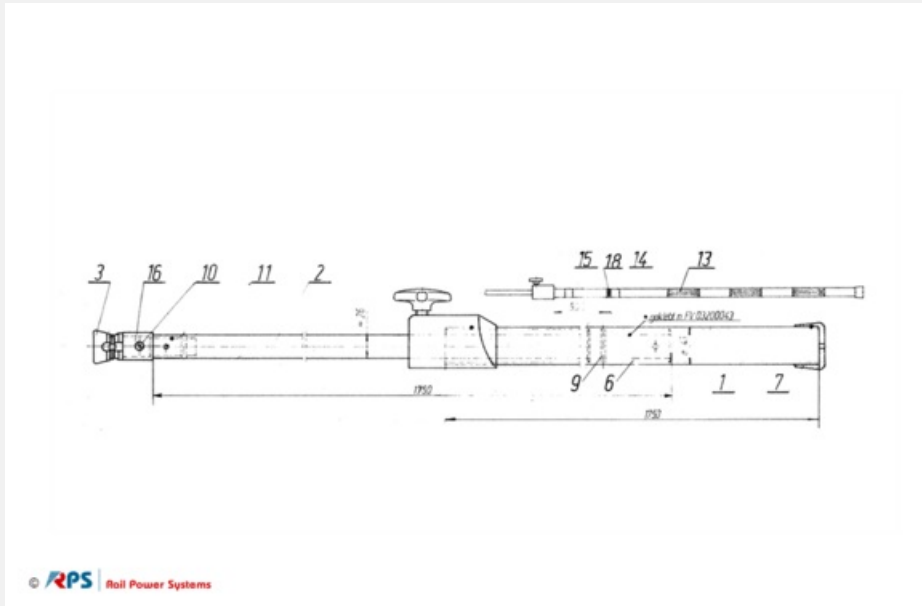

Material-ID	Name	Weight	L	Drawing Number
3EGF011826	Erdungsstange	3,8 kg	1800 - 3500 mm	Gg 715.01 Bl.4.1
3EGF011827	Erdungsstange	3,8 kg	2600 - 5000 mm	Gg 715.01 Bl.4.1

Hoisting tackle (1,5 m) with round steel chain


with steel or aluminium housing

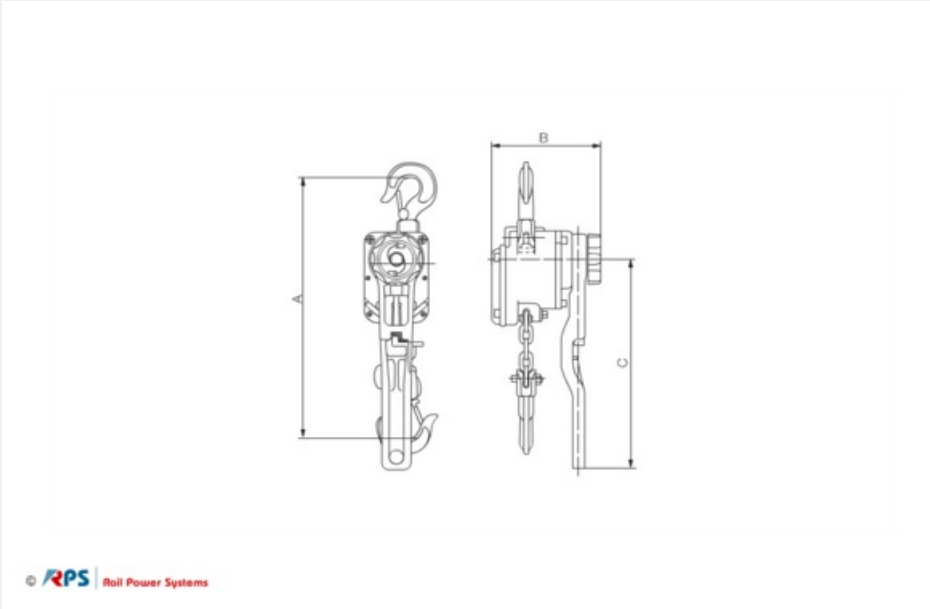

Material-ID	Weight	A	B	C	Nominal Force	Drawing Number
3EGF009943	6,2 kg	280 mm	153 mm	265 mm	7,5 kN	53/03-800 HADEF
3EGF007993	9,6 kg	350 mm	170 mm	415 mm	15,0 kN	53/03-1600 HADEF
3EGF009942	16,5 kg	420 mm	200 mm	415 mm	30,0 kN	53/03-3200 HADEF

Auxiliary mast for slap track

Auf Anfrage! 

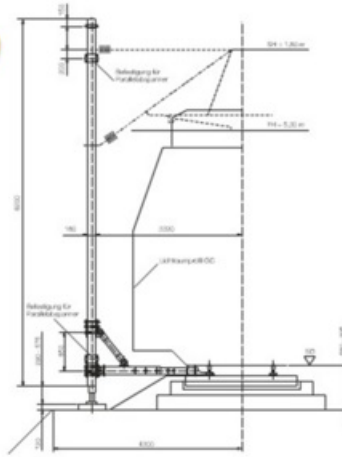


© RPS Rail Power Systems

Material-ID	Drawing Number
3EGF012529	Ebs 04.04.30

Cutout template

for the opening for the conductor rail protective cover on the support

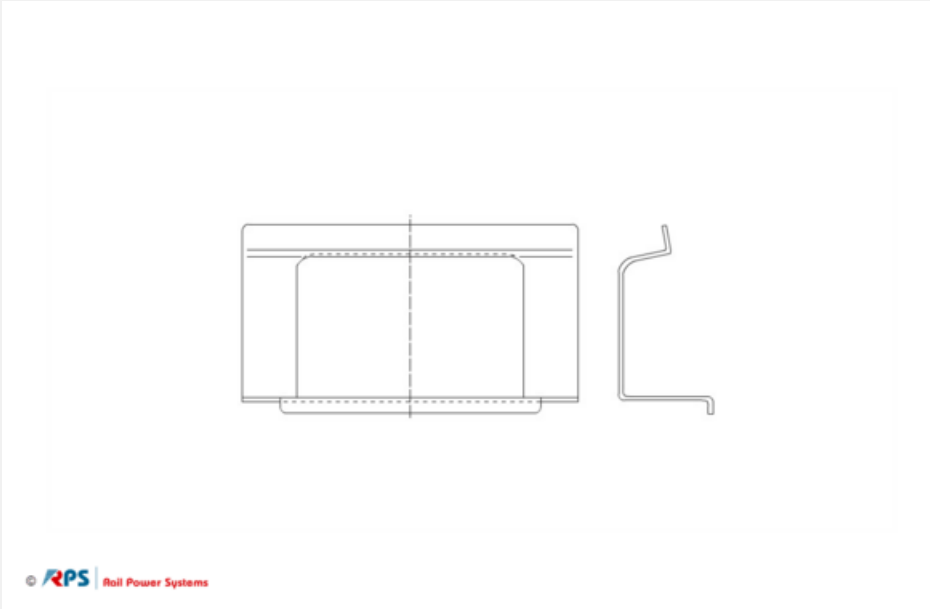


Material-ID	Build Type	Drawing Number
3EGF010483	for glass fibre reinforced conductor rail support	3EGF000092Z6392

Grounding device for no-profile grounding of contact lines of electric trains

for grooved contact wires Ri 80 - 120, round contact wires of Ø 10.6 - 13.2 mm, for rail profiles S 49, S 54, S 64 and UIC 60.

Short circuit current: 35,6 kA

Rope length: 12 m

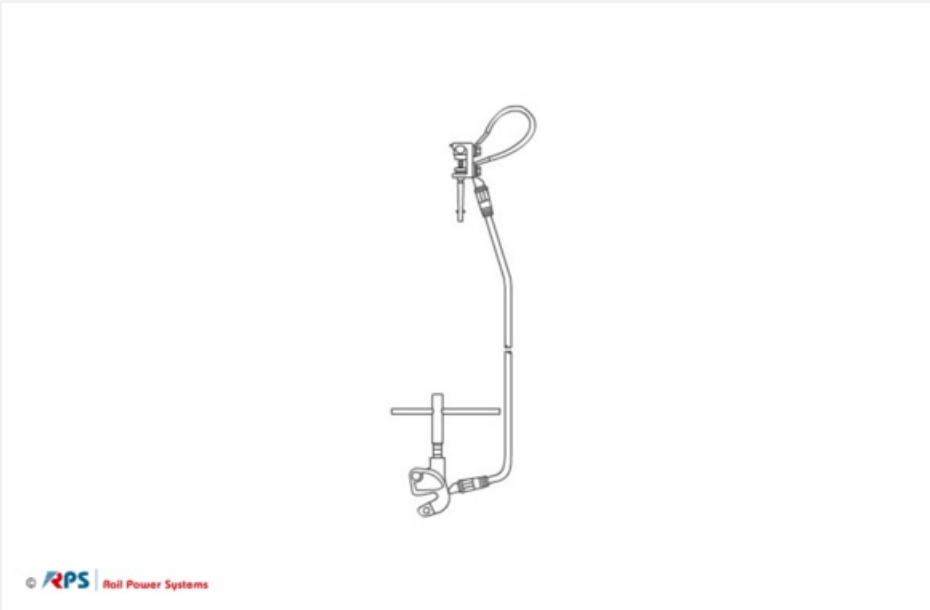

Material-ID	Weight	Rope Q	Drawing Number
3EGF011111	12,45 kg	50 mm²	364845002

Grounding device for feeder and traction current line

for conductor of Ø 4.5-35 mm, with ground wire, conductor and universal clamp, for connection to ball pin Ø 25 mm, with ground rod 3EGF011826.
Short circuit current: 36,5 kA



Material-ID	Build Type	Weight	Rope Q	Drawing Number
3EGF011824	Rope lenght: 4 m	10,5 kg	50 mm²	Gw 715.01. Bl. 19

